

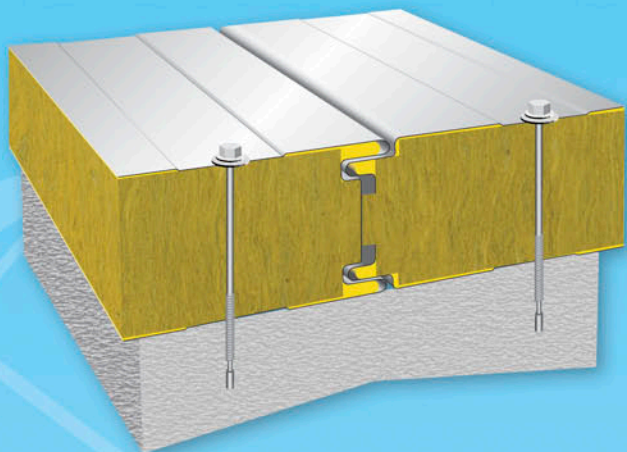
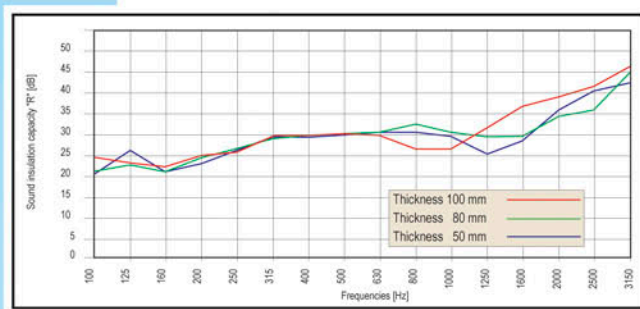


PROTIHLUKOVÉ PANELE SOUND ABSORPTION PANELS

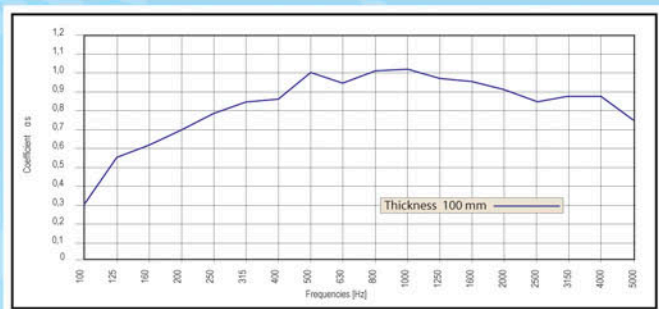

MINERAL
AKUSTICKÝ
ACOUSTIC

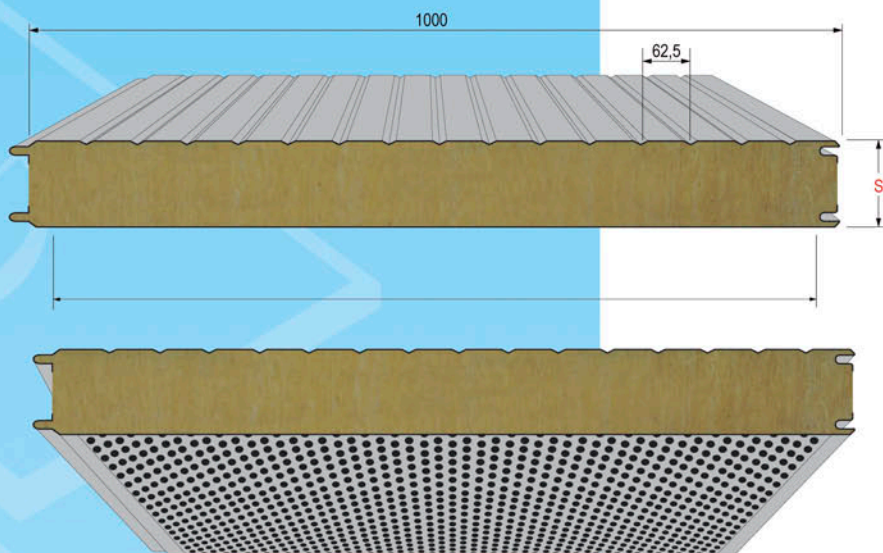

RW=31 - 35dB.

tloušťka panelu [mm] / thickness of panel [mm]	60	80	100
hmotnost [kg/m ²] / weight [kg/m ²]	14,37	17,37	19,37
maximální délka [m] / max lenght [m]	16	16	16
modulová šířka [mm] / width [mm]	1000 - 1100		
součinitel U ₀ [W/m ² K] / heat conductivity coefficient [W/m ² K]	1,33	1,78	2,22
požární odolnost / fire resistance	EI 15	EW 30	EW 55



Cooling tech
Clean tech
Special doors

FRIGO
MONT
Technology

PROJEKCE

DODÁVKA

MONTÁŽ

SERVIS



WWW.FRIGOMONT.CZ

ISO 9001:2009

7